

LK218 Stable Phase Low Loss Cable




Electrical Characteristic	
Frequency Range (GHz)	26.5
Impedance Nominal (Ω)	50
Velocity of Propagation(%)	83
Shielding Attenuation (dB@1 GHz)	>100
Capacitance pf/ft (meter)	24.5 (80.4)
Delay ns/ft (ns/meter)	1.22(3.99)
Attenuation dB/ (meter)	
1GHz	0.19
2GHz	0.27
6GHz	0.50
18 GHz	1.10
Temperature phase stability (-40~100℃)	$\ \Delta\eta\ _{\max} \leq 500\text{PPM}$
Bend phase stability	coil diameter 75mm, $\leq 3^\circ$ /18 GHz


Mechanical Characteristic	
Weight (kg/100m)	7.5
Temperature Range (℃)	-65~165
Minimum Bend Radius inch (mm)	1.1(28)

Construction		
1.Inner Conductor (mm)	1.68	Silver-Plated Copper Wire
2.Insulation	4.55	Low Density PTFE
3.First Outer Shield	4.75	Silver-Plated Copper Foil Shield
4.Second Outer Shield	5.15	Silver-Plated Copper wire Braid
5.Jacket (mm O.D.)	5.55	FEP Jacket

MAX. INSERTION LOSS

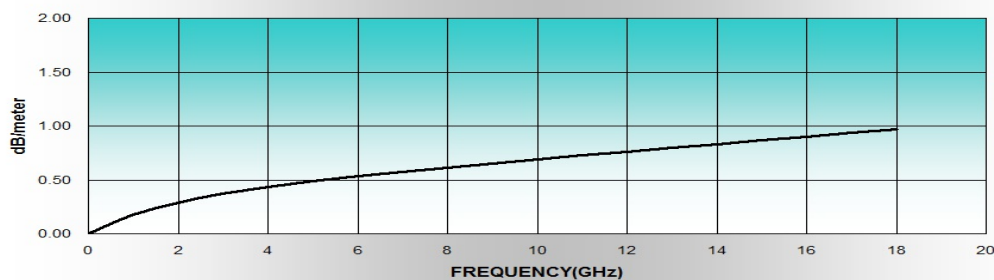

POWER HANDLING VS FREQUENCY

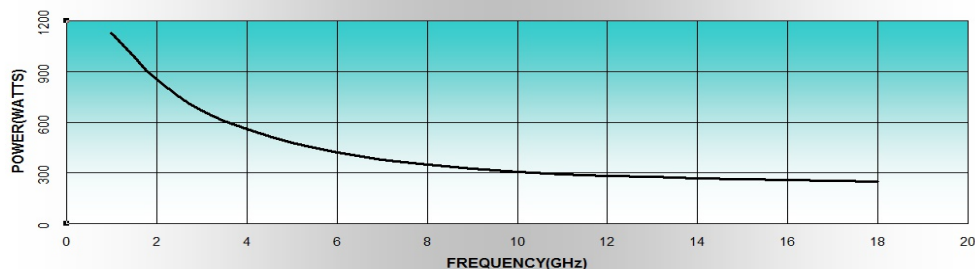

Standard Connector

Connector Model	Gender	Type	Shell Material	Frequency Max(GHz)
SMA-M	Male	Straight	Stainless Steel	18
SMA-F	Female	Straight	Stainless Steel	18
SMA-RA	Male	Right Angle	Stainless Steel	18
N-M	Male	Straight	Stainless Steel	18
N-F	Female	Straight	Stainless Steel	18
N-RA	Male	Right Angle	Stainless Steel	18
TNC-M	Male	Straight	Stainless Steel	18
TNC-F	Female	Straight	Stainless Steel	18
TNC-RA	Male	Right Angle	Stainless Steel	18

Other Material

Material Code	
P S	Polyolefin shrink tube cover
E P	Extruded PVC cover
L S	Layered adhesive lined polyolefin shrink tube
RoHS	RoHS compliant cable assembly (per EU directive 2011-65-EU)